


200 kN
ZE-200-S | translating screw

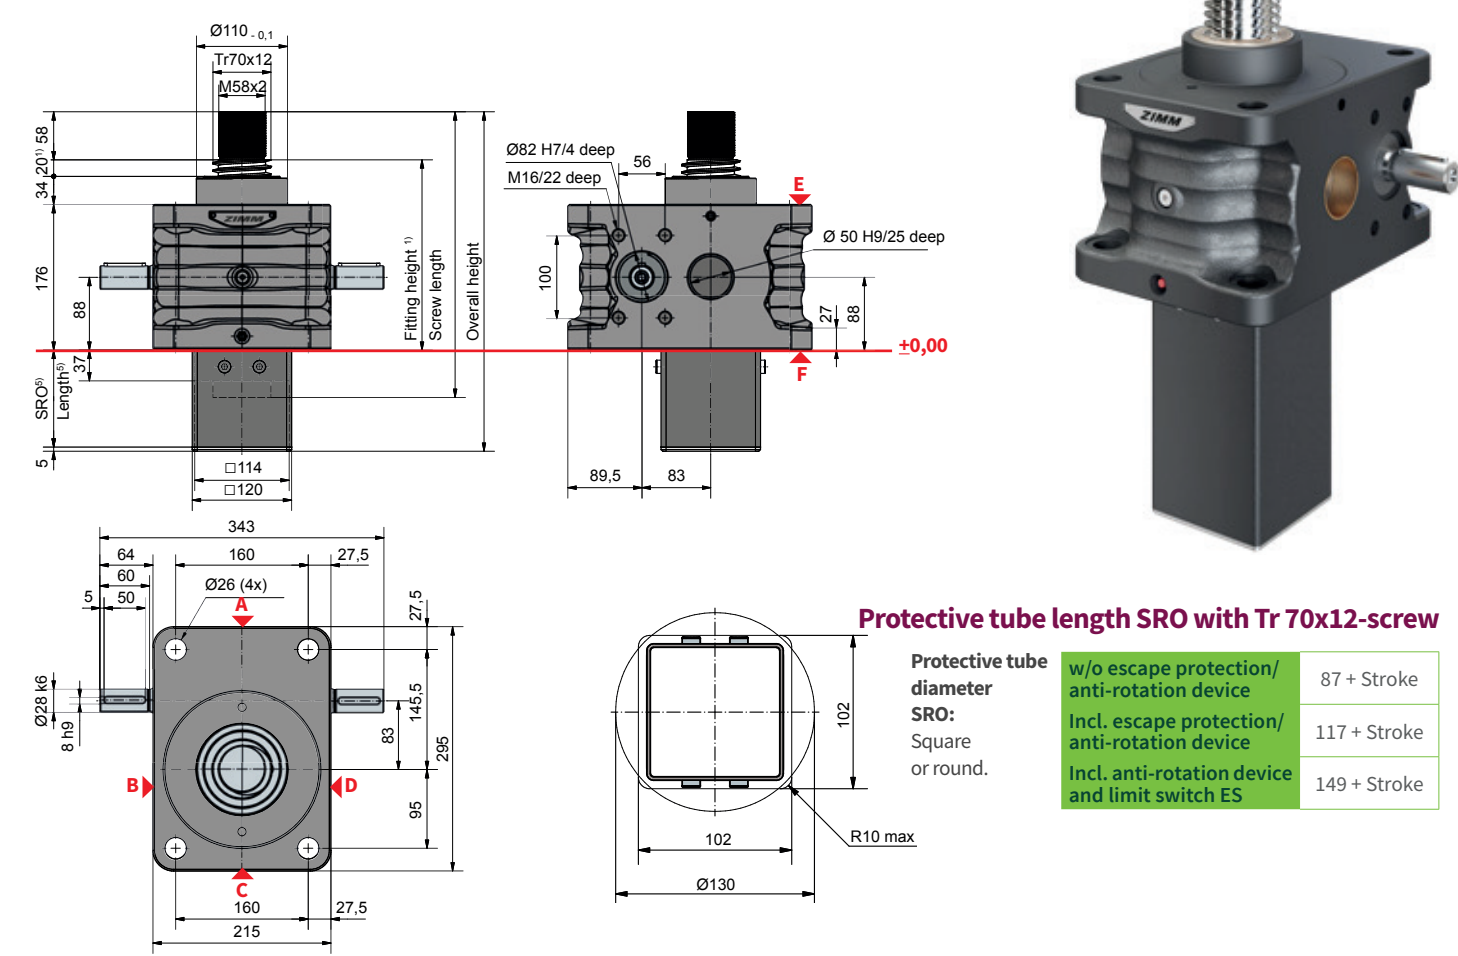


200 kN

Standard configuration

Code	Gearbox series	Size	Version (variant)	Speed & ratio	Screw size	Stroke per drive shaft rotation
ZE-200-SN	ZE	200	S (translating screw)	N (normal) 8:1	Tr 70x12	1,50 mm
ZE-200-SL				L (low-speed) 24:1		0,50 mm

200 kN
ZE-200-R | rotating screw

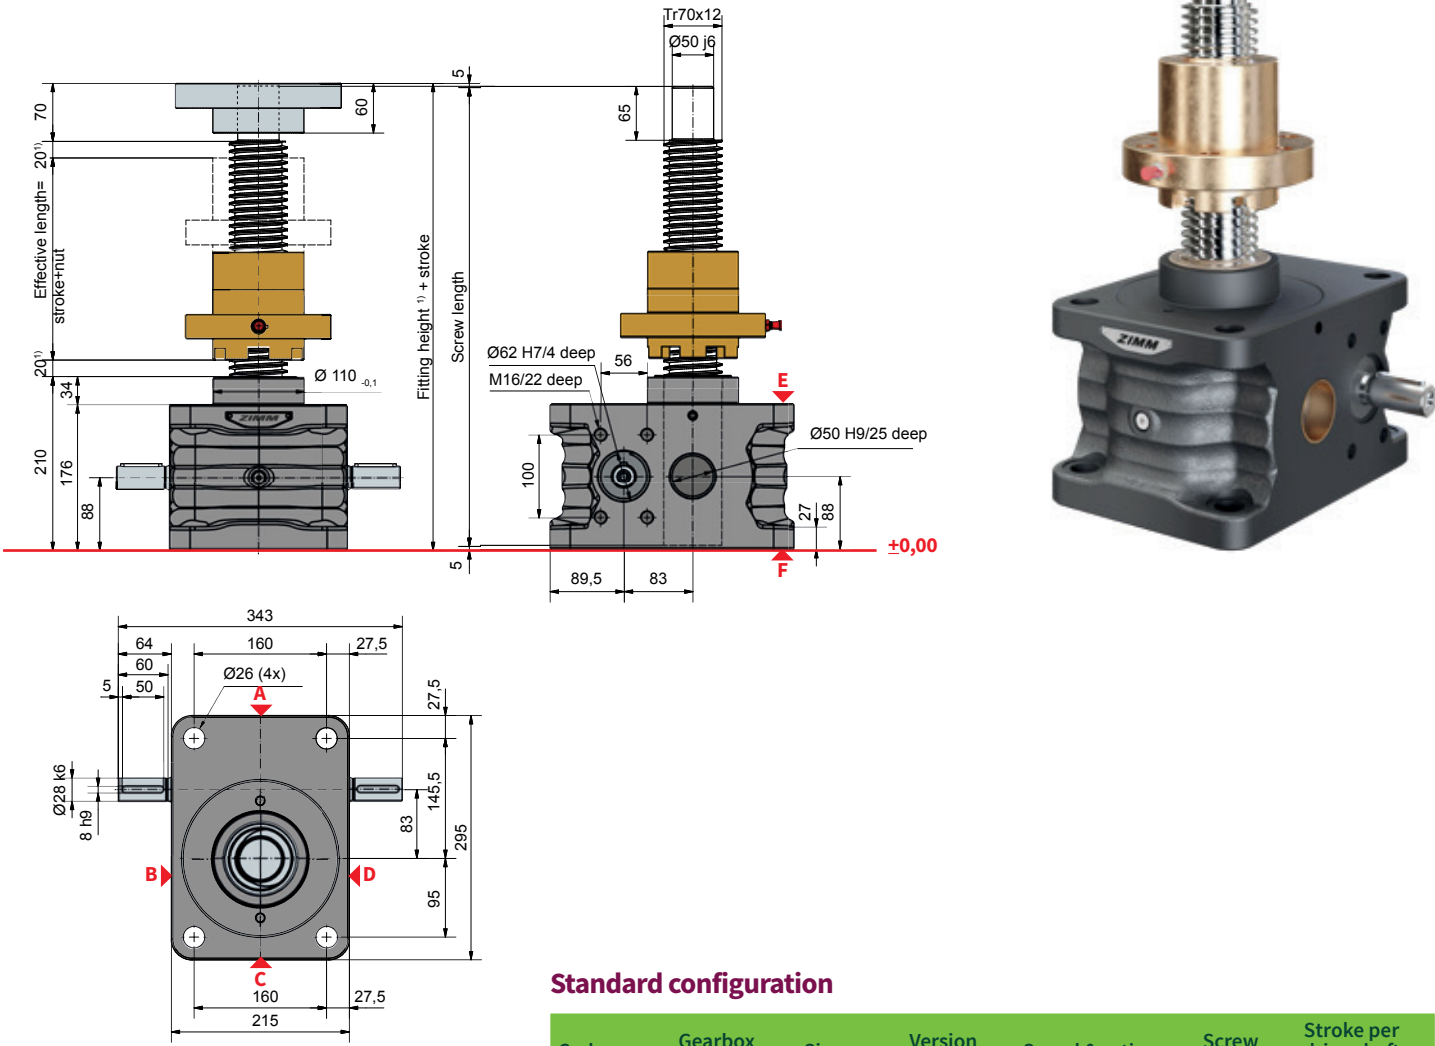


Standard configuration


Code	Gearbox series	Size	Version (variant)	Speed & ratio	Screw size	Stroke per drive shaft rotation
ZE-200-RN	ZE	200	R (rotating screw)	N (normal) 8:1	Tr 70x12	1,50 mm
ZE-200-RL				L (low-speed) 24:1		0,50 mm

Duty cycle thermal limit (S + R) for standard gearbox (grease lubrication)

Ratio „N“ (8:1)

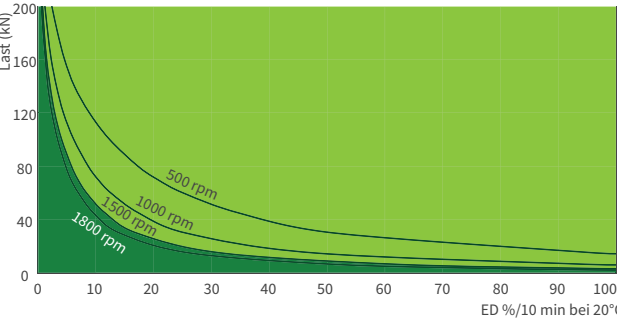

Ratio „L“ (24:1)

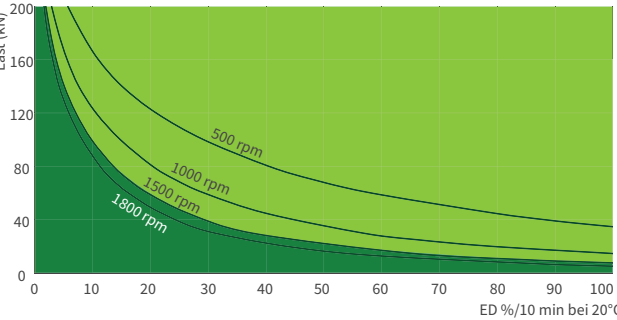

These maps are for orientation under standard industrial terms (ambient temperature 20% etc.) and proper maintenance (lubrication, etc.). They are based on the ZIMM standard trapezoidal thread Tr 70x12. With the use of a ball screw, the operation cycles can be many times longer. In case you need an even longer duration or performance, you will find information about our ZE-H high performance gearboxes chapter 2.3.

Technical data series ZE-200-S / ZE-200-R

max. compressive / tensile force, static:	200 kN (20 t)
max. compressive / tensile force, dyn.:	see duty cycle curves
Input speed:	1500 rpm / max. 1800 rpm (depending on the load and duty cycle)
Screw size standard:	Tr 70x12 ²⁾
Gear ratio:	8:1 (N) / 24:1 (L)
Housing material:	GGG, corrosion-resistant
Worm shaft:	steel, case-hardened, ground
Weight of screw jack body:	50 kg
Weight of screw/m:	25 kg
Gearbox lubrication:	synthetic fluid grease
Screw lubrication:	grease lubrication
Gearbox operating temperature:	max. 60°C, higher on request
Moment of inertia:	N: 11,5 kg cm ² / L: 7,99 kg cm ²
Input torque (at 1500 rpm):	max. 94,5 Nm (N) / max. 39,3 Nm (L)
Drive-thorough torque:	max. 700 Nm
Drive torque M _G (Nm):	F (kN) x 1,1 ^{3,4)} (N-normal) F (kN) x 0,45 ^{3,4)} (L-low-speed)
Breakaway torque:	Drive torque M _G x 1,5

Make a plan to keep a safe distance of at least 10 mm between gearbox and nut or between nut and threaded end!
Detailed length calculations of protection tubes and bellows are easy and convenient with our online configurator: www.zimm.com

Important information:

- 1) If a bellows, spiral spring or double pitch is used; more fitting space is required
- 2) Tr 70x12 is standard, also available: double-pitch, INOX, left-handed
- 3) factor includes efficiency, ratio and 30% safety
- 4) for a 12 mm screw pitch
- 5) to calculate the length of our protective tube length SRO simply use our online configurator: www.zimm.com