



AC BRUSHLESS SERVOMOTORS - DSM5.7x



DSM5 - size SEVEN Brushless Servomotors are AC PM Synchronous servomotors. They have been designed using the latest generation of magnets and construction techniques to provide very high performance, low cogging and torque ripple. They can be supplied with resolver or Incremental / absolute encoder.


Their main characteristics are:

- Frame size 260mm
- Rare earth magnets for high performance
- 8 pole construction for high torque density
- Low cogging and torque ripple
- Sinusoidal back EMF
- Integrated PTC thermal protection
- Rotatable connectors
- Compact design
- High IP rating
- Smooth finish

Technical Data

Tab. 1

Description Winding Code	Symbol	Motor	DSM5.71		DSM5.72		DSM5.73	
		Units	1	2	1	2	1	2
Stall Torque	M_0	Nm	76		147		230	
Maximum Torque	M_{pk}	Nm	200		405		625	
Stall Current	I_0	A	36	25	71	41	103	64
Peak current	I_{pk}	A	107	73	216	126	311	194
Maximum mechanical revs	N_{mec}	min-1	4000		4000		4000	
Maximum revs @ 230Vac	N_{MAX}	min ⁻¹	1500	1000	1500	900	1400	900
Maximum revs @ 400Vac	N_{MAX}	min ⁻¹	2600	1800	2600	1500	2500	1500
Voltage constant	K_E	V/krpm	126	183	126	216	135	216
Torque constant	K_T	Nm/A	2,08	3,03	2,08	3,57	2,23	3,57
Rotor Inertia	J_R	kg cm ²	484		941		1398	
Resistance @ 20°C	R_{U-V}	Ohm	0,14	0,28	0,05	0,12	0,03	0,08
Inductance @ 1 kHz	L_{U-V}	mH	1,5	3,1	0,8	2,2	0,6	1,5
Mass	m	kg	50		81		112	

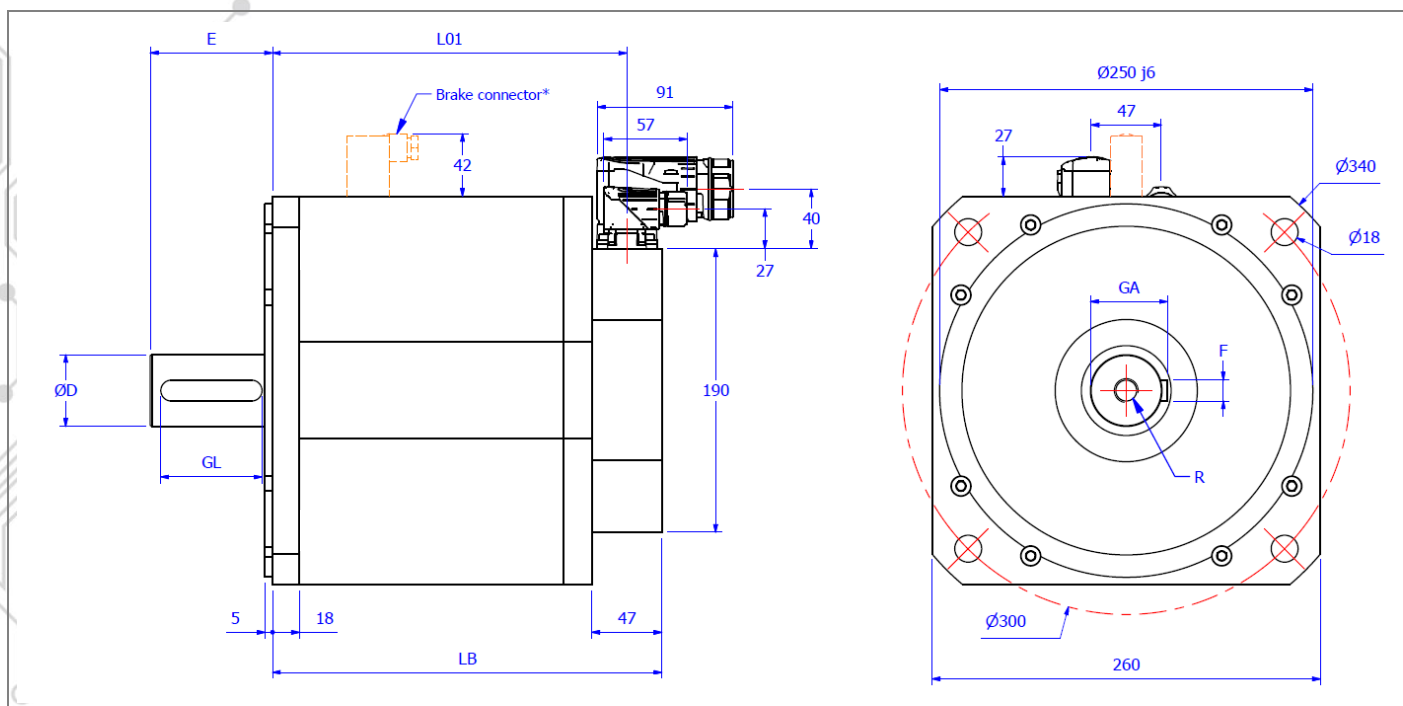

*Connector present only on brake motors

Information Use the 3 pole connector to supply the motor brake. During the installation, provide for a separated supply dedicated to the brake.

Dimensions in mm

Tab. 2

Feedback device	TTL 2048ppr, Resolver, SinCos, SKM36		
Dimension	LB	L01	L03
DSM5.71	261	214	47
DSM5.72	341	294	
DSM5.73	421	374	
DSM5.71 Brake	314	267	
DSM5.72 Brake	394	347	
DSM5.73 Brake	474	427	

Dimensions in mm

Tab. 3

Dimension	Shaft
D	48k6
E	82
GL	70
GA	51.5
F	14
R	M16 x 25

Values in this catalogue are true for the following conditions:

- Max ambient temperature 40° C
- Min ambient temperature 0 °C
- Max Altitude 1000 m (above sea level)
- Insulation class F (materials F & H)
- RMS values
- Insulation system conforms to UL
- IP65 enclosure protection with shaft seal
- Motor Installation B5 – V5
- Cooling IC410
- Typical tolerance value $\pm 10\%$
- Continuous ratings apply with a rise of $\Delta T=100K$ on the windings when fitted on an aluminium plate with dimensions 457 x 457 x 15 mm

Sangalli reserves the right to amend the specification of this product without prior notification.

PART NUMBER COMPOSITION

1	2	3	4	5	6	7	8	9	10	11	12
D	S	M	5	7	2	2	0	4	9	x	x

POS. DESCRIPTION

1-3 Product

DSM = PM synchronous motor, self-cooled
 DSF = PM synchronous motor, forced air-cooled
 DSW = PM synchronous motor, water-cooled

4 Motor type

Series 5

5 Motor size

Size Seven

6 Motor length

1 = Mo 76Nm
 2 = Mo 145Nm
 3 = Mo 230Nm

7 Voltage

1 = Winding code 1
 2 = Winding code 2

8 Holding brake

0 = Without Brake
 1 = Permanent Magnet Brake $24 \pm 6\% V_{DC}$ $M_{br} = 120Nm$ $37W$ $J_{br} = 82,0 \text{ kgcm}^2$ $m = 13kg$

9 Feedback

0 = Sensorless
 4 = Incremental Encoder 2048 PPR + hall
 6 = Incremental Encoder 4096 PPR + hall
 7 = Encoder sin-cos 1 Vpp 2048 with CD channels
 9 = Resolver 2p 7V 10KHz
 W = Sick encoder EKS36 17bit NO SIL, DSL
 Y = Sick encoder EKM36 18bit Multi turn NO SIL, DSL
 Z = Sick encoder SKM36 Hiperface 128i PPT Multi turn

Available on request SIL option on some types of encoders

10 Connection type

9 = M40 90° 6 poles power connector / M23 90° feedback connector

11-12 Special version *(Below some examples, for further details please contact our technical support.)*

26 = Smooth Shaft
 66 = IP65 Shaft Protection
 90 = Thermal Protection PT1000
 xx = Special Shaft and Flanges (on request)

SANGALLI SERVOMOTORI



SANGALLI SERVOMOTORI S.r.l.

VIA FEDERICO ROSSI, 5
20900 - MONZA (MB) - ITALY

TEL. 1 : 00-39-039-2020322

TEL. 2 : 00-39-039-2020747

FAX : 00-39-039-2020656

INFO@SANGALLISERVOMOTORI.IT

WWW.SANGALLISERVOMOTORI.IT

MOTORS & MOTION CONTROL

- **DSM5 BRUSHLESS SERVOMOTORS**
- **DSG SYNCHRONOUS PM GENERATORS**
- **RARE EARTH SC DC SERVOMOTORS**
- **DSW WATER-COOLED**
- **LOW-COST SOLUTIONS**
- **PLANETARY GEARS**
- **CUSTOMISED SOLUTIONS**
- **TORQUE MOTORS**
- **FRAMELESS SPINDLE MOTORS**



ISD : E220486

